

C700

IRIDIUM CERTUS® Winterized Maritime Terminal



FEATURES

THE MOST POWERFUL IRIDIUM CERTUS TERMINAL AVAILABLE

The Intellian C700 maritime satellite terminal's unique hemispherical 12-patch phased array antenna delivers excellent low-elevation-angle RF efficiency so that the RF performance of the C700 is better than any other terminal in the market. Further, as the H2 amplifier has been implemented, the terminal can deliver the full 352 kbps uplink speed as well as the downlink speed of 704 kbps. Being connected to the Certus network of Low-Earth Orbit (LEO) satellites means that you can communicate globally, pole-to-pole.

The winterized C700 terminal is designed to withstand extreme low temperature environments, while maintaining its high end performance. It allows the terminal to operate in harsh weather conditions like the polar regions.

SYSTEM HIGHLIGHTS

- Designed for extreme harsh low temperature conditions (ADU operating temp. -50°C ~ +55°C)
- Static 12 element patch phased-array antenna with beam switching capability
- H2 class antenna amplifier to fully support 704/352 Kbps service profile
- Excellent low elevation angle performance down to -7° elevation, equivalent to 15° ship motion
- Easy installation with single coax cable for power and data
- AptusLX easy-to-navigate dashboard for PC, tablet and smart phone
- Built-in firewall, port forward and user access management
- GMDSS ready
- Three simultaneous high quality voice lines
- Wi-Fi and 4-port Ethernet switch with PoE support
- Connect up to 16 IP and 2 analog phones with Soft PBX function
- Designed for minimum 10-year operational lifetime

BEST-IN-CLASS FEATURES AND VALUE

The C700 offers a variety of features such as supporting three high-quality, low-latency voice lines simultaneously, a built-in firewall, automatic switching between satellite and Wan (e.g. 3G/LTE modem) connection, and soft PABX. These technical capabilities and GMDSS readiness make it ideal for both vessel operations and crew welfare services.

Designed for easy installation and configuration, combined with Intellian's ability to ship from global logistics centers results in lower costs for customers and greater flexibility. Customers can also rely on the industry-leading 3-year warranty policy and global service partners to ensure dependable communications no matter where they operate.

A PERFECT VSAT COMPANION SOLUTION

The advanced performance of the C700 provides customers across all markets the flexibility to deploy the C700 as the primary communication antenna or as a companion to a VSAT system for seamless redundancy. The Aptus platform also offers advanced remote support and diagnostics, making it an ideal VSAT out-of-band management solution.

C700	CODE
Rack Type	C1-70-A0HR
ITEMS	ADU, BDU, Coaxial cable (25m/82ft) DC power cable. Ethernet cable. Wi-Fi antenna, AC/DC power adaptor, 19" rack mounting bracket

C700

IRIDIUM SERVICES

Voice	3 simultaneous HD voice lines
IP Data (Background)	Uplink: up to 352 Kbps / Downlink: up to 704 Kbps
Short Burst Data	Yes

PHYSICAL

ADU Dimensions	700 x 720 mm / 27.5" x 28.3"
ADU Weight	21kg (46.3 lbs)
BDU Dimensions	280 x 190 x 41 mm / 11" x 7.2" x 1.45"
BDU Weight	1.2 kg (stand-alone type) / 2.6 lb

ANTENNA POWER

DC Input	10.8 ~ 30 V DC
Power (max)	120 W

HEATING DEVICE POWER

AC Input	220VAC, 0.91A
Power (max)	200 W

RF / ANTENNA

Tx Frequency	1616 MHz ~ 1626.0 MHz
Rx Frequency	1616 MHz ~ 1626.5 MHz
Antenna Gain	HGA 2 Class
Antenna Connectors	TNC female (ADU) – TNC female (BDU)
GNSS	GPS, GLONAS, Galileo
Wi-Fi	802.11 b/g

APPROVAL

Certification	CE/RED, FCC, RMRS
---------------	-------------------

ENVIRONMENTAL CONDITIONS

Operating Temp. range	ADU: -50°C ~ + 55°C, BDU: -15°C ~ + 55°C
Operating Humidity range	More than 95%
Water Ingress	ADU: IP56, BDU: IP31
Shock & Vibration	Shock: IEC60068-2-27 (operation), IEC60721-3-6 Class 6M3 (survival) Vibration: IEC60945 (operation), IEC60721-3-6 Class 6M3 (survival)

I/O

LAN	3 x RJ45 (2 PoE)
WAN	1 x RJ45
Analog Phone	1 x RJ14 (2 x Analog Phone)
Wireless	1 Wi-Fi (SMA RP)
I/O	10 pin GPIO
Etc.	SIM, Reset, On/Off, Ground

Global HQ

Innovation Center
Intellian Technologies, Inc
T +82 31 379 1000

APAC

Seoul
Intellian Technologies, Inc.
T +82 2 511 2244

Americas


Irvine
Intellian Technologies USA, Inc.
T +1 949 727 4498 Toll Free +1 888-201-9223

EMEA


Rotterdam
Intellian B.V.
T +31 1 0820 8655

SYSTEM DIMENSION


ADU

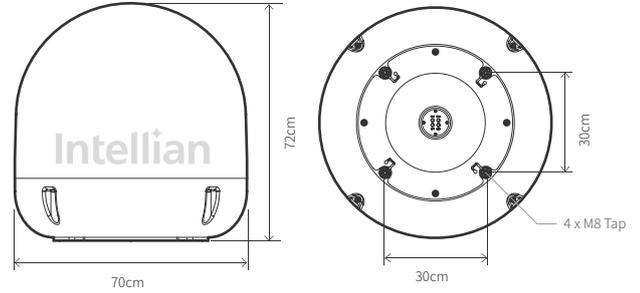

BDU

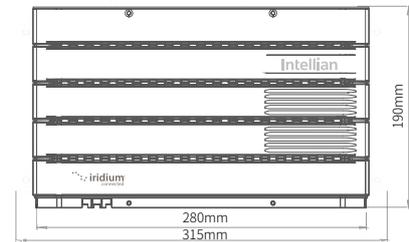

19" Rack-Mount Bracket Assembled

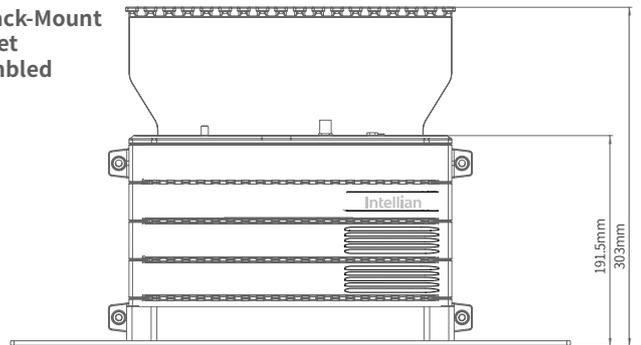

SYSTEM DIAGRAM

