

Intellian[®] Fiber Link

Fiber Optic Connection for VSAT and TVRO Systems
Connected at the Speed of Light



Simple Connection Using High Speed Fiber

One Fiber Optic cable combines the TX and RX signals in a VSAT system, in a TVRO system it combines up to 4 LNB signals into one lightweight cable.

A Single Fiber Optic Cable

A single fiber optic cable connects the VSAT or TVRO antenna to the BDU, reducing the number of cables required, making installation more straightforward.

No Cable Run Limitations.

With less signal loss than Coax cable, and much lighter, there is no cable run length limitations. No measurable signal loss up to 2000 meters.

Reduces Installation Time

A single cable, saves time and reduces weight of the installation.



*Not supplied

Intellian

Connect with the best

Intellian® Fiber Link

Fiber Optic Connection for VSAT and TVRO Systems

Technical Specifications

Mechanical Specification	Fiber Link VSAT	Fiber Link TVRO
Above Deck Unit Size (inside antenna)	27cm x 17cm x 3.6cm / 10.63" x 6.69" x 1.41"	27cm x 17cm x 3.6cm / 10.63" x 6.69" x 1.41"
Above Deck Unit Weight (inside antenna)	1.5Kg / 3.3lbs	3.48kg / 8.37lbs
Below Deck Module Size (19 inch rack)	43.1cm x 38cm x 4.44cm / 16.96" x 14.96" x 1.74"	43.1cm x 38cm x 4.44cm / 16.96" x 14.96" x 1.74"
Below Deck Module Weight (19 inch rack)	3.1Kg / 6.83lbs	3.62Kg / 7.98lbs
Optical Specification		
Frequency Range	10MHz~2.2GHz	950~2150MHz (400/433MHz for comm.)
Link Gain	0dB typ. (±4dB)	0dB typ. (±4dB)
Link Gain Ripple (any 36MHz)	±1dB (typical)	±1dB (typical)
Gain Stability (dB/24hr@room temp.)	±0.25dB (typical)	±0.25dB (typical), ±0.3dB max
Output IP3	+36dBm	+36dBm
Input / Output Impedance	50ohm	75ohm
Connector Type	FC/APC	FC/APC
Electrical Specification		
Supply Voltage	110/220V AC	110/220V AC
Power Consumption (Tx)	5W	N/A
Power Consumption (Rx)	5W	15W max (ADU & BDU)

VSAT Fiber Link Solution


This solution is applicable for v100, v100GX and v240CK systems that use the AC power supply direct to the antenna. The Fiber Link Module consists of two modules. The lower BDU module is 1U Rack type unit which is connected to the ACU and the modem. And the upper ADU module is small unit mounted inside the bottom of the Radome.

TVRO Fiber Link Solution


This solution is applicable for the t240CK that uses the AC power supply direct to the antenna. The Fiber Link Module consists of two modules. The lower BDU module is 1U Rack type unit which is connected to the ACU and the multi-switch. The upper ADU module is small unit installed inside the bottom of the Radome.

The TVRO Fiber Link solution requires multiple cables based on the configuration of the TVRO system. Small fiber optic cables take up less room than a single coax cable and are much lighter and easier to install.

VSAT System Diagram

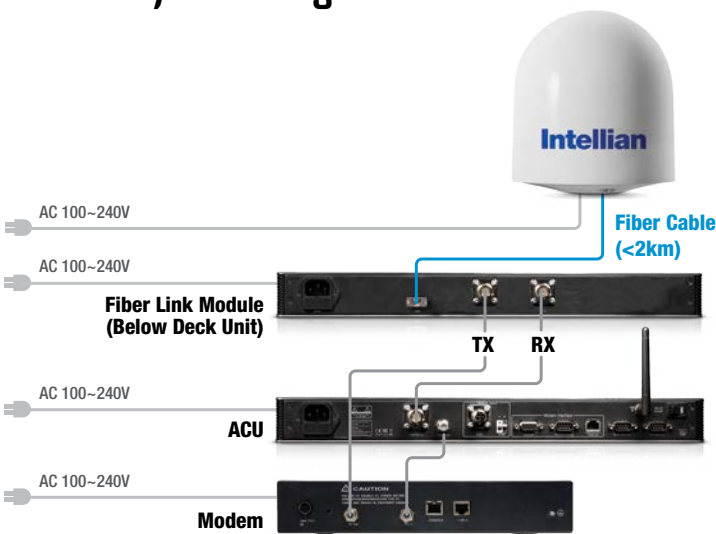

TVRO System Diagram

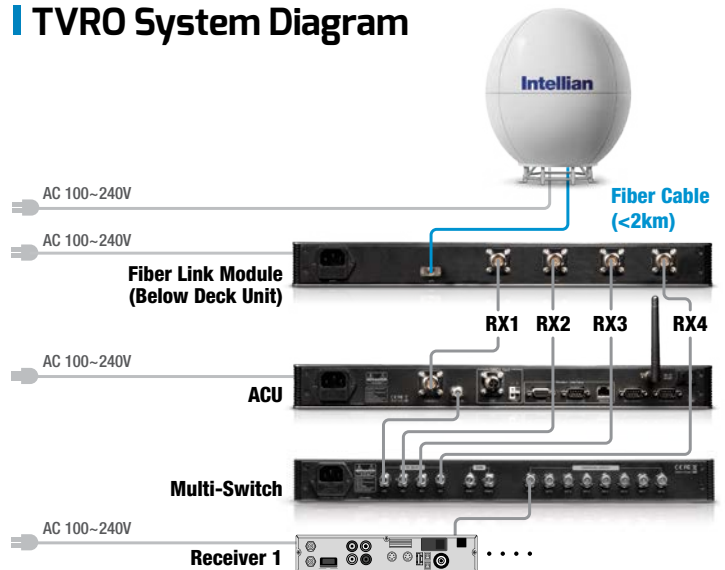

Global HQ
Innovation Center / Factory
Intellian Technologies, Inc
T +82 31 379 1000
F +82 31 377 6185

APAC
Seoul Office
Intellian Technologies, Inc.
T +82 2 511 2244
F +82 2 511 2235

Americas
Irvine Office
Intellian Technologies USA, Inc.
T +1 949 727 4498
F +1 949 271 4183
Toll Free +1 888-201-9223

EMEA
Rotterdam Office
Intellian B.V.
T +31 1 0820 8655
F +31 1 0820 8656