



# C 2 0 0 L

## IRIDIUM CERTUS® 200 Land Terminal



### FEATURES

#### IRIDIUM CERTUS® TERMINAL DESIGNED FOR FIXED LAND APPLICATIONS

The Intellian C200L has been designed and manufactured as a small and lightweight fixed land terminal, perfect for use where traditional terrestrial connectivity is unavailable or as a back up in the event that the terrestrial network is unavailable. It can be used for a range of applications including business continuity, remote community and disaster response. It is also an ideal solution to provide out of band management for VSAT terminals.

The Intellian C200L provides IP data speeds of up to 176 kbps (up and down) and supports multiple concurrent voice calls. Customers will gain both scalability and advanced performance over the Iridium Certus network whenever needed.

#### LOWER TOTAL COST OF OWNERSHIP

Intellian focus on delivering value to our customers through low total cost of ownership. This comes from building highly reliable terminals that are easy to install and have a wide range of features and functionality that reduces the amount of additional equipment required. Intellian's responsive global support teams are there to help if needed and the terminal comes with a market leading 3 year parts and labour warranty.

#### ALL-IN-ONE SOLUTION

The C200L delivers unparalleled features and functionality that include: WAN mediator, Wi-Fi antenna, built-in soft PBX & firewall. Bringing all these features together in one package simplifies installation & configuration, and eliminates the possibility of conflicts that can occur when these features are provided using connected equipment.

#### TRUE GLOBAL COVERAGE WITH IRIDIUM CERTUS®

The Intellian Certus C200L satellite terminal utilizes the Iridium Certus network of Low-Earth Orbit (LEO) satellites, providing low latency, high speed and always-on communication. Powered by a uniquely sophisticated global constellation of 66 cross-linked Low-Earth Orbit (LEO) satellites, the Iridium® network provides high-quality voice and data connections over the planet's entire surface.

#### SYSTEM HIGHLIGHTS

- Designed for the land market
- IP data speeds of 176 kbps up and down
- Includes dedicated interference blocking elements, making the terminal inherently resilient to interference from terrestrial cellular equipment
- Easy installation and simple configuration
- Built-in WAN mediator
- Wi-Fi antenna
- Built-in firewall
- Three simultaneous high quality voice lines
- 4-Port Ethernet (LAN) PoE and WAN
- Connect up to 16 SIP phones with Soft PBX function
- Designed for 10-year operational lifetime
- 3-year global warranty - parts and labour

# C200L

## IRIDIUM SERVICES

Voice	3 simultaneous HD voice lines
IP Data	<b>Uplink:</b> up to 176 kbps / <b>Downlink:</b> up to 176 kbps

## PHYSICAL

ADU Dimensions	240 x 145 mm / 9.45" x 5.71"
ADU Weight	3.5 kg / 7.7 lb
BDU Dimensions	280 x 190 x 41 mm / 11" x 7.2" x 1.45"
BDU Weight	1.2 kg (stand-alone type) / 2.6 lb

## POWER

DC Input	10.8 ~ 30 V DC
Power (max)	110 W

## RF / ANTENNA

Tx Frequency	1616 MHz ~ 1626.0 MHz
Rx Frequency	1616 MHz ~ 1626.5 MHz
Antenna Gain	L2 Class
Antenna Connectors	TNC female (ADU) – TNC female (BDU)
GNSS	GPS, GLONASS, Galileo
Wi-Fi	802.11 b/g

## APPROVAL

Certification	CE/RED, FCC, RoHS, ETSI
---------------	-------------------------

## ENVIRONMENTAL CONDITIONS

Operating Temp. range	<b>ADU:</b> -30°C ~ +55°C, <b>BDU:</b> -15°C ~ +55°C
Operating Humidity range	More than 95%
Water Ingress	<b>ADU:</b> IP66, <b>BDU:</b> IP31
Shock & Vibration	<b>Shock:</b> IEC60068-2-27 (operation), IEC60721-3-6 Class 6M3 (survival) <b>Vibration:</b> IEC60945 (operation), IEC60721-3-6 Class 6M3 (survival)

## I/O

LAN	3 x RJ45 (2 PoE)
WAN	1 x RJ45
Analog Phone	1 x RJ14 (2 x Analog Phone)
Wireless	Wi-Fi Antenna (SMA-RP)
I/O	10 pin GPIO
Others	SIM, Reset, On/Off, Ground

## Global HQ

Innovation Center  
Intellian Technologies, Inc  
T +82 31 379 1000

## APAC

Seoul  
Intellian Technologies, Inc.  
T +82 2 511 2244

## Americas


Irvine  
Intellian Technologies USA, Inc.  
T +1 949 727 4498 Toll Free +1 888-201-9223

## EMEA


Rotterdam  
Intellian B.V.  
T +31 1 0820 8655

## SYSTEM DIMENSION


### ADU

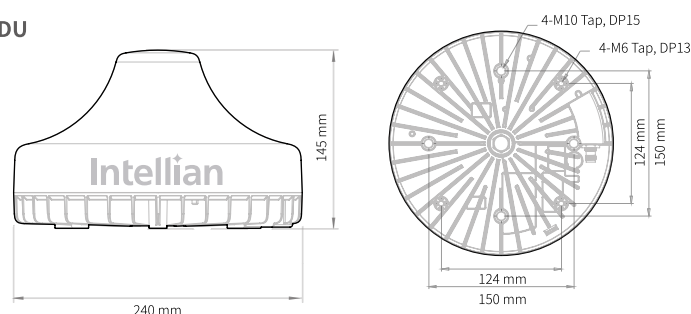

### BDU

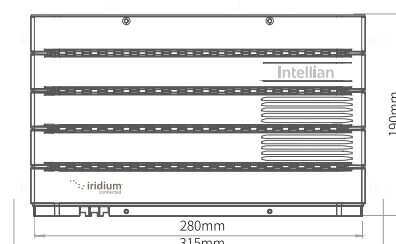

### BDU with 19" rack mounting kit fitted

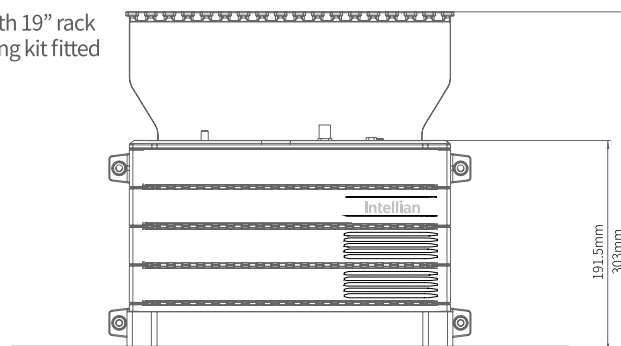

## SYSTEM DIAGRAM

